


# Stick-on Mounting

• SEE PAGE 6 FOR HOW TO ORDER  
• SEE PAGE 7 FOR SAMPLE REQUEST

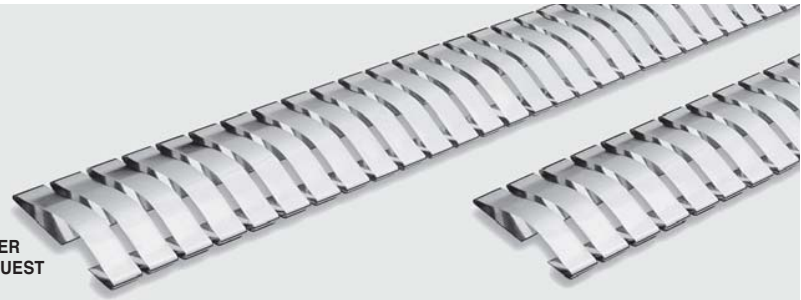


## 187W35 SOFT NO-SNAG FINGERS

### Compression Force

	25% Compression (0.083")	50% Compression (0.055")
Standard .003" Thk.	25 lbs/ft	89 lbs/ft
"TF" Style .002" Thk.	6 lbs/ft	23 lbs/ft

Note: Also available with optional double adhesive transfer tape.

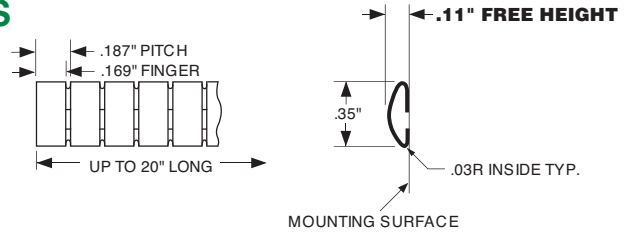


## 125LPS35 SPIDER LOW PROFILE NO-SNAG

### Compression Force

	25% Compression (0.060")	50% Compression (0.040")
Standard .002" Thk.	*	*

\* Note: Consult factory for performance data.

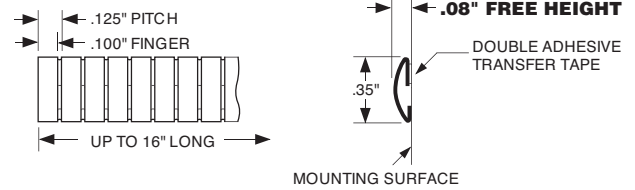


## 125LPS45H060 SPIDER HOOK & STICK-ON LOW PROFILE NO-SNAG

### Compression Force

	25% Compression (0.060")	50% Compression (0.040")
Standard .002" Thk.	*	*


\* Note: Consult factory for performance data.

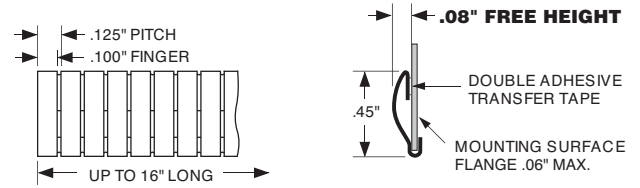

## 125G28 LOW PROFILE NO-SNAG

### Compression Force


	25% Compression (0.045")	50% Compression (0.030")
Standard .002" Thk.	5.5 lbs/ft	20.4 lbs/ft

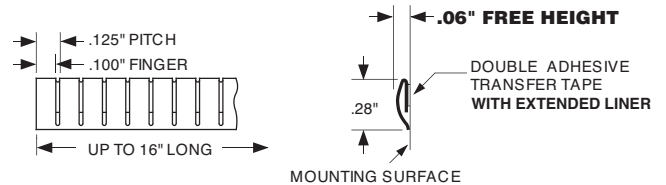

## 125G32 LOW PROFILE NO-SNAG

### Compression Force

	25% Compression (0.060")	50% Compression (0.040")
Standard .002" Thk.	6.8 lbs/ft	17 lbs/ft

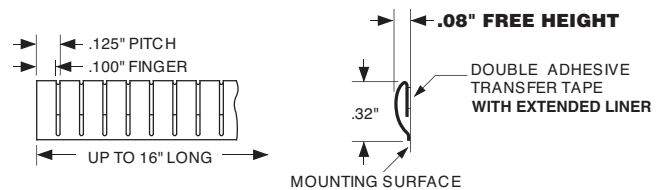


## 125LP45 LOW PROFILE NO-SNAG

### Compression Force


	25% Compression (0.060")	50% Compression (0.040")
Standard .0035" Thk.	10 lbs/ft	19 lbs/ft
"TF" Style .0025" Thk.	8.9 lbs/ft	17 lbs/ft

Note: (SS) Also available in Stainless Steel (SS125LP45)

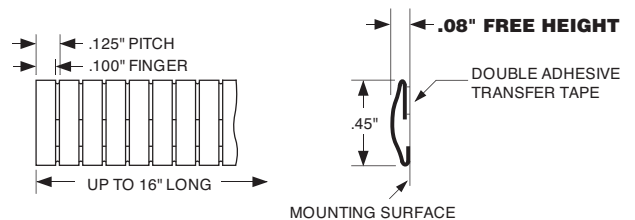

# Stick-on Mounting

• SEE PAGE 6 FOR HOW TO ORDER  
• SEE PAGE 7 FOR SAMPLE REQUEST

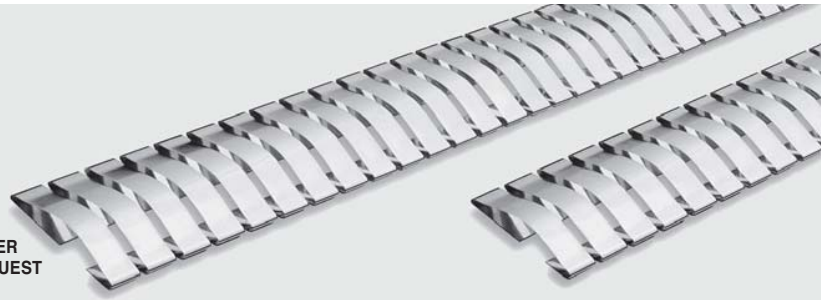


## 125LP60 LOW PROFILE NO-SNAG

### Compression Force

	25% Compression (0.090")	50% Compression (0.060")
Standard .0035" Thk.	12 lbs/ft	24 lbs/ft
"TF" Style .0025" Thk.	5.0 lbs/ft	11 lbs/ft


Note: (SS) Also available in Stainless Steel (SS125LP60)

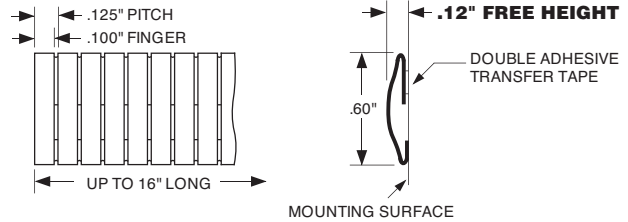

## 125LP55 LOW PROFILE NO-SNAG

### Compression Force

	25% Compression (0.113")	50% Compression (0.075")
Standard .0035" Thk.	19 lbs/ft	35 lbs/ft
"TF" Style .0025" Thk.	7.5 lbs/ft	14 lbs/ft

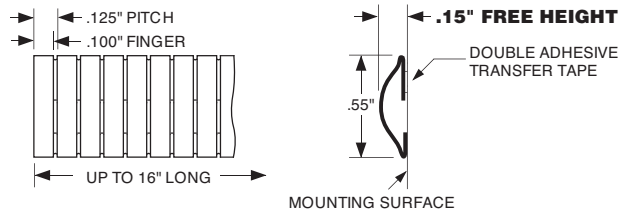


## 125LP45H060 HOOK & STICK-ON LOW PROFILE NO-SNAG

### Compression Force

	25% Compression (0.045")	50% Compression (0.030")
Standard .0035" Thk.	10 lbs/ft	19 lbs/ft
"TF" Style .0025" Thk.	6.4 lbs/ft	17 lbs/ft

Note: (SS) Also available in Stainless Steel (SS125LP45H060)

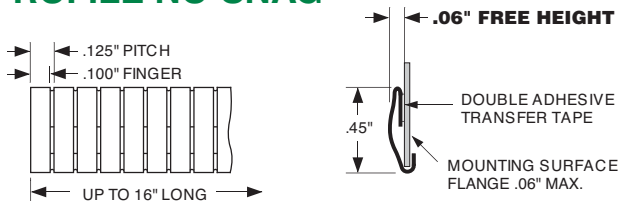


## 125LP60H060 HOOK & STICK-ON LOW PROFILE NO-SNAG

### Compression Force

	25% Compression (0.068")	50% Compression (0.045")
Standard .0035" Thk.	8.7 lbs/ft	17.3 lbs/ft
"TF" Style .0025" Thk.	5.8 lbs/ft	9.0 lbs/ft


Note: (SS) Also available in Stainless Steel (SS125LP60H060)

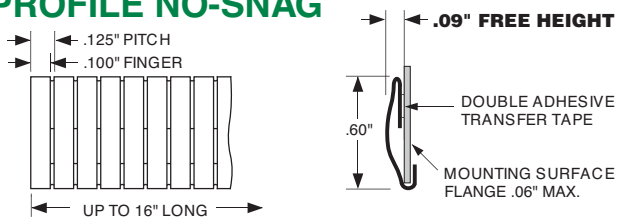

## 125LP55H060 HOOK & STICK-ON LOW PROFILE NO-SNAG

### Compression Force


	25% Compression (0.105")	50% Compression (0.070")
Standard .0035" Thk.	19 lbs/ft	35 lbs/ft
"TF" Style .0025" Thk.	6.8 lbs/ft	14 lbs/ft

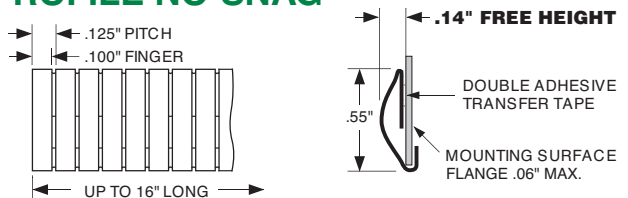

## 60P21 SOFT NO-SNAG FINGERS

### Compression Force

	25% Compression (0.060")	50% Compression (0.040")
Standard .002" Thk.	11 lbs/ft	34 lbs/ft

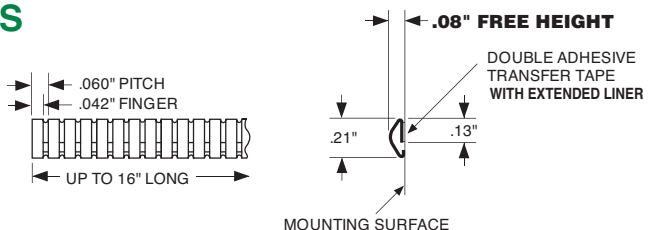

# Stick-on Mounting

• SEE PAGE 6 FOR HOW TO ORDER  
• SEE PAGE 7 FOR SAMPLE REQUEST




## 187P21 SOFT NO-SNAG FINGERS

### Compression Force

	25% Compression (0.060")	50% Compression (0.040")
Standard .002" Thk.	17 lbs/ft	47 lbs/ft

Note: (SS) Also available in Stainless Steel (SS187P21)

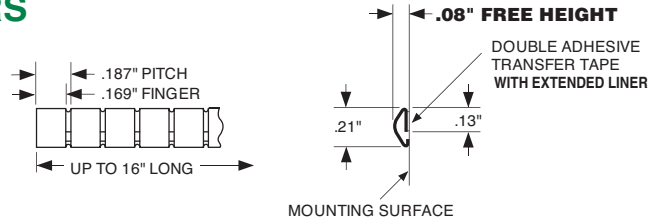


## 187P28 SOFT FINGERS

### Compression Force

	25% Compression (0.083")	50% Compression (0.055")
Standard .002" Thk.	15 lbs/ft	32 lbs/ft


Note: Also available in 25 ft. rolls.

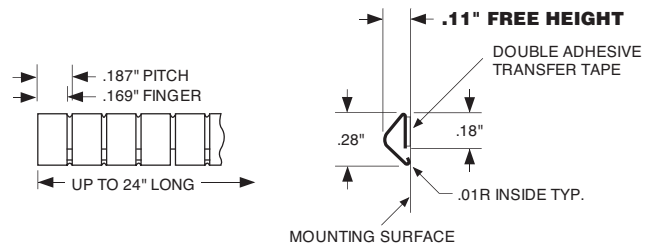

## 187P32 SOFT NO-SNAG FINGERS

### Compression Force


	25% Compression (0.083")	50% Compression (0.055")
Standard .002" Thk.	14 lbs/ft	26 lbs/ft

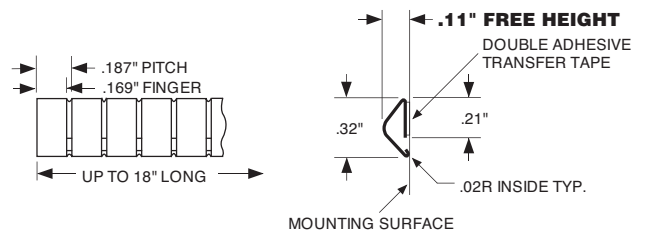

## 250P37 SOFT NO-SNAG FINGERS

### Compression Force


	25% Compression (0.098")	50% Compression (0.065")
Standard .002" Thk.	10 lbs/ft	21 lbs/ft

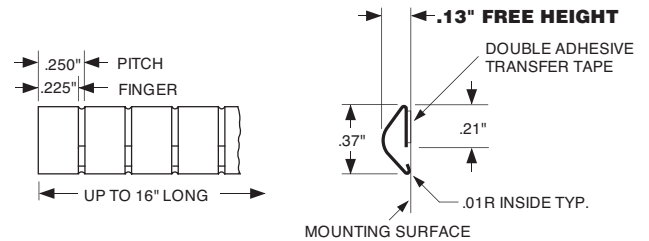

## 250P37E50 SOFT NO-SNAG FINGERS

### Compression Force


	25% Compression (0.098")	50% Compression (0.065")
Standard .002" Thk.	10 lbs/ft	21 lbs/ft

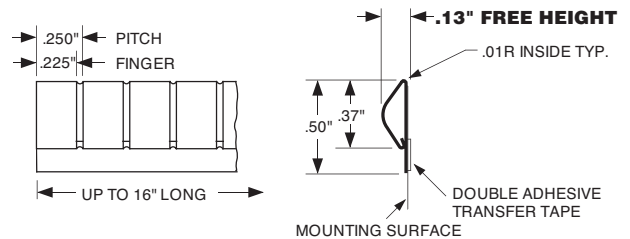

## 375P60 SOFT NO-SNAG FINGERS


### Compression Force

	25% Compression (0.165")	50% Compression (0.110")
Standard .0035" Thk.	10 lbs/ft	20 lbs/ft
"TF" Style .002" Thk.	2.0 lbs/ft	7.2 lbs/ft

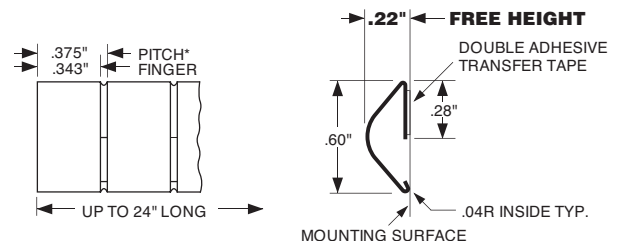

# Stick-on Mounting


• SEE PAGE 6 FOR HOW TO ORDER  
• SEE PAGE 7 FOR SAMPLE REQUEST

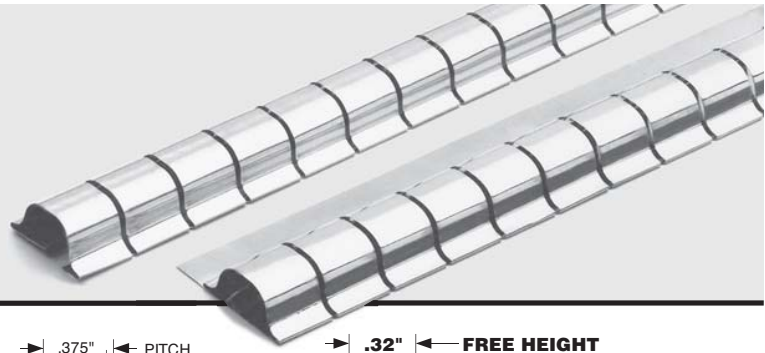

## 375P80 SOFT NO-SNAG FINGERS

### Compression Force

	25% Compression (0.240")	50% Compression (0.160")
Standard .004" Thk.	7 lbs/ft	17 lbs/ft

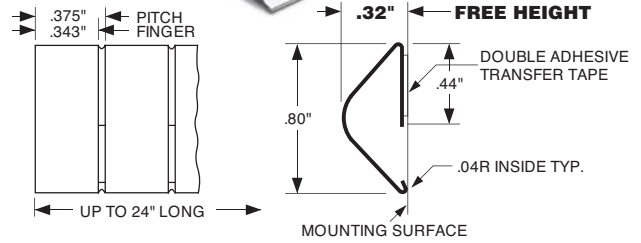


## 500P110 SOFT NO-SNAG FINGERS

### Compression Force

	25% Compression (0.300")	50% Compression (0.200")
Standard .005" Thk.	12 lbs/ft	24 lbs/ft

Note: Up to 18" long.

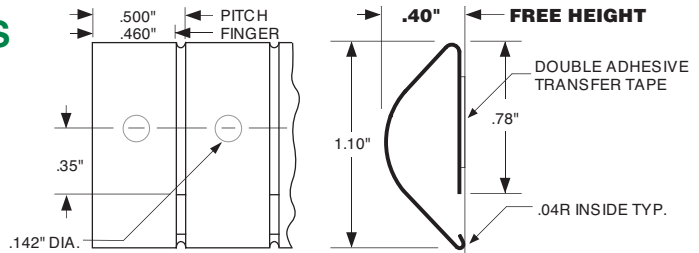


## 156M32 NO-SNAG FINGERS

### Compression Force

	25% Compression (0.075")	50% Compression (0.050")
Standard .0035" Thk.	30 lbs/ft	76 lbs/ft

Note: Also available in .187" Pitch. (187M32)

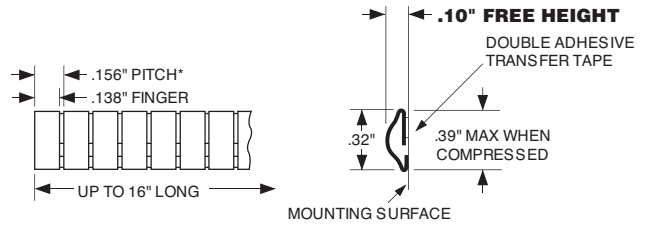


## 250M37 NO-SNAG FINGERS

### Compression Force

	25% Compression (0.098")	50% Compression (0.065")
Standard .0035" Thk.	30 lbs/ft	60 lbs/ft

Note: Also available in .125" Pitch. (125M37)

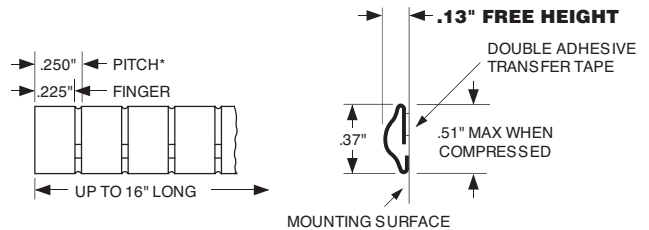


## 375M60 NO-SNAG FINGERS

### Compression Force

	25% Compression (0.165")	50% Compression (0.110")
Standard .0035" Thk.	13 lbs/ft	32 lbs/ft


Note: Also available in .187" Pitch. (187M60)

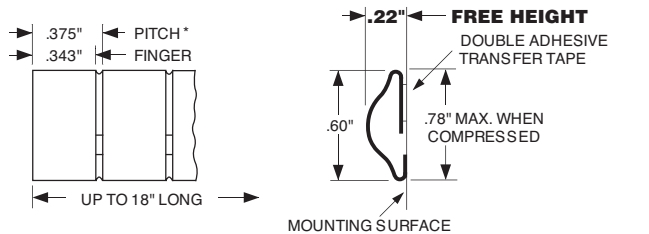

## 375M60E78 NO-SNAG FINGERS


### Compression Force

	25% Compression (0.165")	50% Compression (0.110")
Standard .0035" Thk.	13 lbs/ft	32 lbs/ft

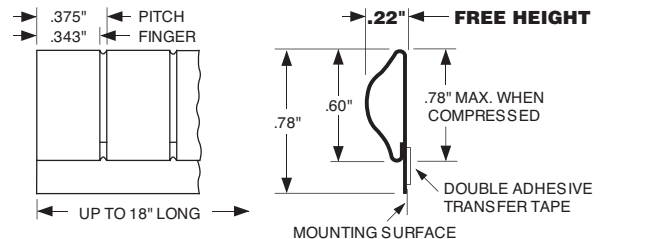

# Stick-on Mounting



• SEE PAGE 6 FOR HOW TO ORDER  
• SEE PAGE 7 FOR SAMPLE REQUEST

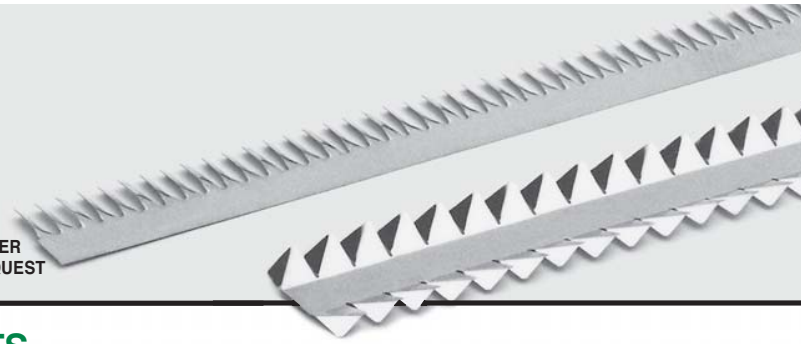

## 95A TWISTED CONTACTS

### Compression Force

	25% Compression (0.023")	50% Compression (0.015")
Standard .005" Thk.	15 lbs/ft	69 lbs/ft





\* FINGERS ARE TWISTED APPROXIMATELY 30°

## 95T TWISTED CONTACTS

### Compression Force

	25% Compression (0.023")	50% Compression (0.015")
Standard .003" Thk.	5.8 lbs/ft	35 lbs/ft
"TF" Style .002" Thk.	4.9 lbs/ft	19 lbs/ft

Notes: Also available in 25 ft. rolls. (95TM / TF95TM)  
(SS) Also available in Stainless Steel (SS95T)





\* COMPRESSED DIM.

## 95T90° TWISTED CONTACTS

### Compression Force

	25% Compression (0.023")	50% Compression (0.015")
Standard .003" Thk.	12 lbs/ft	51 lbs/ft
"TF" Style .002" Thk.	2.5 lbs/ft	10 lbs/ft

Note: (SS) Also available in Stainless Steel (SS95T90°)

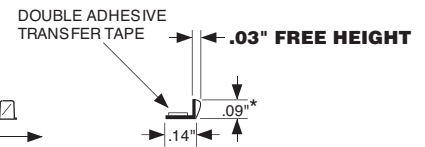



\* COMPRESSED DIM.

## 165TW.300 TWISTED CONTACTS

### Compression Force

	25% Compression (0.053")	50% Compression (0.035")
Standard .003" Thk.	18 lbs/ft	36 lbs/ft

Note: Also available in 25 ft. rolls. (165TMW.300)




\* COMPRESSED DIM.

## 165T TWISTED CONTACTS

### Compression Force

	25% Compression (0.053")	50% Compression (0.035")
Standard .003" Thk.	18 lbs/ft	36 lbs/ft
"TF" Style .002" Thk.	4.2 lbs/ft	11 lbs/ft

Notes: Also available in 25 ft. rolls. (165TM / TF165TM)  
(SS) Also available in Stainless Steel (SS165T)





\* COMPRESSED DIM.

## 165T90° TWISTED CONTACTS

### Compression Force

	25% Compression (0.053")	50% Compression (0.035")
Standard .003" Thk.	18 lbs/ft	36 lbs/ft
"TF" Style .002" Thk.	4.2 lbs/ft	11 lbs/ft

Note: (SS) Also available in Stainless Steel (SS165T90°)

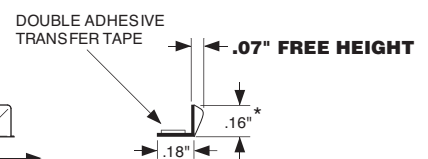

\* COMPRESSED DIM.

# Stick-on Mounting

• SEE PAGE 6 FOR HOW TO ORDER  
• SEE PAGE 7 FOR SAMPLE REQUEST




## 165T2 TWISTED CONTACTS

### Compression Force

	25% Compression (0.053")	50% Compression (0.035")
Standard .003" Thk.	19 lbs/ft	38 lbs/ft

Note: Also available in 25 ft. rolls. (165T2M)

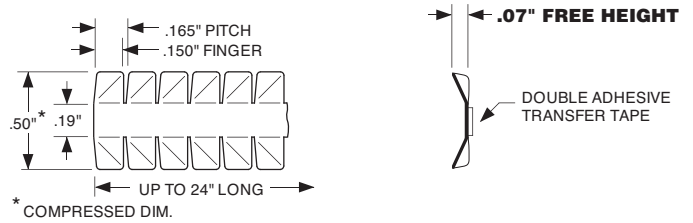


## 250T TWISTED CONTACTS

### Compression Force

	25% Compression (0.090")	50% Compression (0.060")
Standard .003" Thk.	5.0 lbs/ft	11 lbs/ft


Note: Also available in 25 ft. rolls. (250TM)

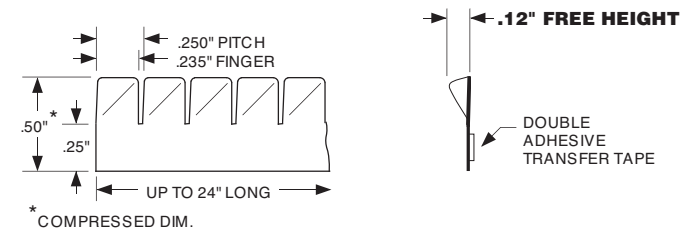

## 500T TWISTED CONTACTS

### Compression Force

	25% Compression (0.158")	50% Compression (0.105")
Standard .004" Thk.	14 lbs/ft	21 lbs/ft

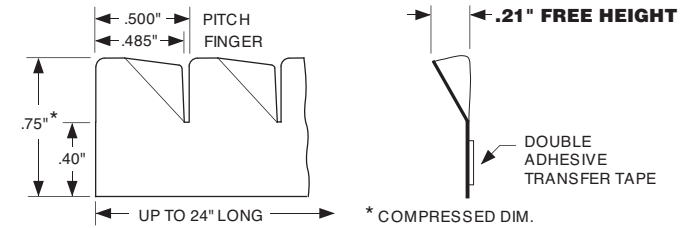


## LP45 SLOTLESS GASKET

### Compression Force

	25% Compression (0.060")	50% Compression (0.040")
Standard .0035" Thk.	12 lbs/ft	50 lbs/ft
"TF" Style .0025" Thk.	*	*

\* Note: Consult factory for performance data.

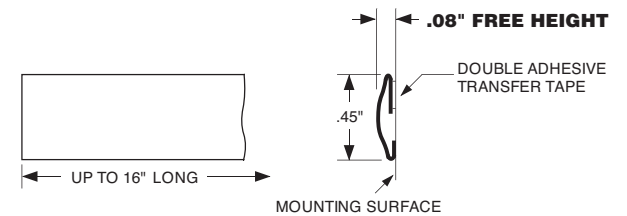


## LP60 SLOTLESS GASKET

### Compression Force

	25% Compression (0.090")	50% Compression (0.060")
Standard .0035" Thk.	13 lbs/ft	35 lbs/ft
"TF" Style .0025" Thk.	*	*

\* Note: Consult factory for performance data.

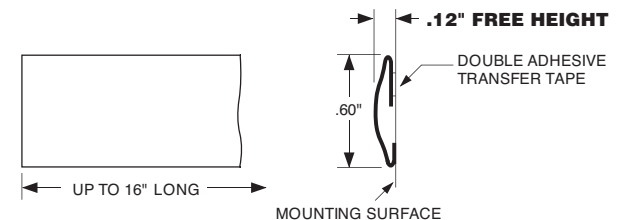

## SS725EXS-2 EXPANSION SLOT GASKET

Stainless Steel  
.004" Thk.

Note: Drawing shown at reduced scale.

